




Quick Set-up Guide Model: DB7103/DB7103PA

Step 1. Remove snow thrower from carton and place control panel behind it.



Step 2. Install the lower and upper handlebars.

1. Remove the 4 bolts and washers attached to the rear of the frame and install lower handle bars there.
2. Attach upper and lower handle bars using the set of 4 curved bolts, washers, and knobs. Tighten firmly.

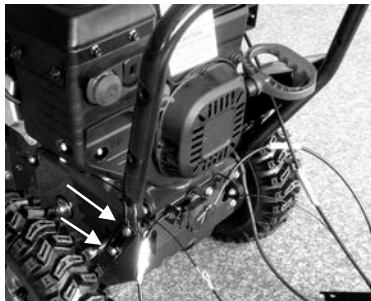

NOTICE: Do not bend or kink the control cables. The cables should be routed under the handle assembly and not wrapped around the handle or knobs. The cables must move freely and not bind.



Step 3. Installing the chute.

1. Remove the bolts and nuts from the bracket at the base of the chute.
2. Position the chute arm next to the bracket and use the bolts to secure it.
3. Replace the nuts inside the bracket and tighten firmly.



Step 4. Installing the chute handle.

1. Attach holder to the left side of upper handle bars by removing a washer and nut from the end, inserting into the hole, then reattaching.
2. 1. Remove the screw from the end of the handle then insert into the sleeve. Insert screw and tighten.

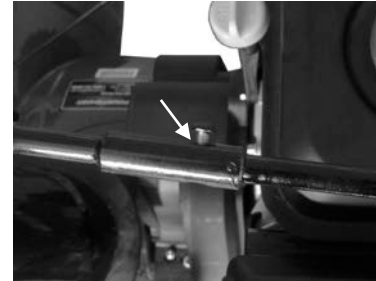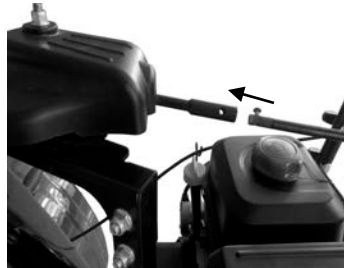

Step 5. Install the skid shoes.

1. Raise auger housing so that the shave plate is just above the ground.
2. Attach skid shoes.



Step 6. Add oil and gasoline

1. Add 5W30 Oil up to the range level on the dip stick (approximately half a quart)
2. Fill gas tank with fresh 87 octane or higher unleaded gasoline.



Tips - You can find a video of the set up instructions on our website.

Powersmartusa.com

Amerisuninc.com

©2016 Amerisun Inc., Itasca IL